

# ThinkVision T27i

BUILT TO PERFORM IN ANY BUSINESS ENVIRONMENT



## MAKING WORK AN IMMERSIVE EXPERIENCE

The ThinkVision T27i-10 is a high-performance monitor that offers long term productivity for intense data and graphic applications. With the wide, borderless In-Plane Switching display for enhanced visual experience, and multiple ports for versatile connectivity, the ThinkVision T27i-10 lets you explore your potential and realize it.


The NearEdgeless full-HD display, the bezel of which is as thin as 2 mm, making for easy connection to multiple displays with seamless visual clarity. The ThinkVision T27i-10 comes with an array of ports including four USB 3.0 ports, VGA, DP, and HDMI to boost your productivity. The ergonomic stand is compatible with ThinkCentre Tiny and the sound bar, enabling you to utilize the ThinkVision T27i-10 to the fullest. Eye Comfort certification by TÜV ensures these displays are easy on the eyes, giving you the comfort you need.

## FEATURES OF THINKVISION T27i-10



### NearEdgeless Display

The ThinkVision T27i-10 includes a 1920 x 1080 full-HD resolution that ensures sharp imagery and vivid colors. The space-saving bezel is 2 mm thin, beneficial especially if you are interacting with multiple screens.

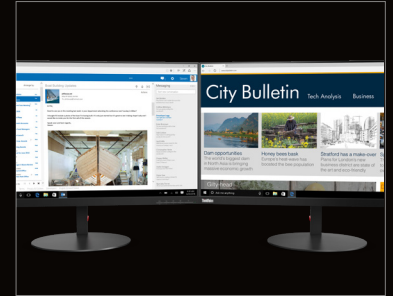

### Effective Connectivity

A range of ports such as VGA, DP, and HDMI, ensure your connectivity needs are met. With four USB 3.0 ports, connect to as many devices and increase your productivity.



### Practical Design

The ThinkVision T27i-10 is built to support your work and your environment. Easily mount the ThinkCentre Tiny with a clamp the way you like. The sound bar extension is ready to add to your groove.



# ThinkVision T27i-10

## DISPLAY

### Panel Size

27 inch

### Screen Dimensions (H x V) (mm)

597.89 (H) × 336.31 (V)

### Panel Type

In-Plane Switching

### Backlight

WLED

### Aspect Ratio

16:9

### Resolution

1920 × 1080

### Pixel Pitch (H x V) (mm)

0.3110 × 0.3110

### Viewing angle (H x V)

178° / 178°

### Response Time (gray to gray)

4 ms (extreme mode)

6 ms (normal mode)

### Brightness (typical)

250 cd/m<sup>2</sup>

### Contrast Ratio (typical)

1000:1

### Dynamic Contrast Ratio (typical)

3M:1

### Color Gamut NTSC (CIE 1931)

72%

### Color Support

16.7M

## CONNECTIVITY

### Video Input Signals

VGA + HDMI 1.4 + DP 1.2

### USB Hub

Yes

1 x USB 3.0 (Upstream)

4 x USB 3.0 (Downstream, incl. 1BC)

### Cable Length

1.8 m

### Audio Out

Yes (3.5 mm)

### Power Consumption

22W (Typical) / 58W (max) at On mode;

<0.5W at Sleep mode; <0.3W at Switch off mode

## MULTI-MEDIA

### Optional Soundbar Support

Yes

## DIMENSIONS

### Size Packed (D x H x W) (mm/inch)

187 x 455 x 715 mm / 7.362 x 17.913 x 28.15 inch

### Size Unpacked w/stand (D x H x W) (mm/inch) (Lowest Position)

269.8 x 403.3 x 611.9 mm / 10.62 x 15.88 x 24.09 inch

### Size Unpacked w/stand (D x H x W) (mm/inch) (Highest Position)

269.8 x 513.3 x 611.9 mm / 10.62 x 20.21 x 24.09 inch

### Size Unpacked w/o stand (D x H x W) (mm/inch) (Head Only)

49.9 x 366.5 x 611.9 mm / 1.96 x 14.43 x 24.09 inch

### Weight Packed (kg/lbs.)

9.32kg / 20.55 lbs.

### Weight Unpacked (kg/lbs.)

6.55kg / 14.44 lbs.

### Weight (Monitor Head Only) (kg/lbs.)

4.60kg / 10.14 lbs.

## SPECIAL FEATURES

### Anti-Glare

Yes

### Thin Client Support (Tiny)

Yes

(by Tiny Clamp Bracket Kit+VESA

mount PN:4XFON82412+

PN:4XFON03161)

## MECHANICAL

### Tilt Angle (front/back)

-5°/30°

### Swivel Angle (left/right)

-45°/+45°

### Lift (Max range)

110 mm

### Pivot

-90°/90°

### VESA Mount

Yes (100 mm)

### Kensington Lock Slot

Yes

### Cable Management

Yes

### Bezel Color

Raven Black

### Bezel Width (Side)

2.0 mm

## WHAT'S IN THE BOX

Monitor with stand

1 x Power cable

1 x VGA cable

1 x DP-DP cable

1 x HDMI cable (NA only)

1 x USB 3.0 cable

Quick setup guide

## CERTIFICATIONS

### ENERGY STAR Rating

8.0

### CCC

Yes

### TCO

8.0

### EPEAT

Silver

### ULE

Gold

### Windows Certification

Windows 7, Windows 10

### China Energy Efficiency Standard

Tier 2

### Ambient Operating Temperature

0°C to 40°C

### Eye Comfort Certification

Yes



© 2020 Lenovo. All rights reserved. Depending on many factors such as the processing capability of peripheral devices, file attributes, and other factors related to system configuration and operating environments, the actual transfer rate using the various USB connectors on this device will vary and is typically slower than the data rates as defined by the respective USB specifications: - 5 Gbit/s for USB 3.1 Gen1; 10 Gbit/s for USB 3.1 Gen2 & 20 Gbit/s for USB 3.2. These products are available while supplies last. Prices shown are subject to change without notice. For any questions concerning price, please contact your Lenovo Account Executive. Lenovo is not responsible for photographic or typographic errors. Warranty: For a copy of applicable warranties, write to: Warranty Information, 500 Park Offices Drive, RTP, NC 27709, Attn: Dept. ZPYA/B600. Lenovo makes no representation or warranty regarding third-party products or services. Trademarks: Lenovo, the Lenovo logo, Rescue and Recovery, ThinkPad, ThinkCentre, ThinkStation, ThinkVantage, and ThinkVision are trademarks or registered trademarks of Lenovo. Microsoft, Windows, and Vista are registered trademarks of Microsoft Corporation. Intel, the Intel logo, Intel Inside, Intel Core, and Core Inside are trademarks of Intel Corporation in the U.S. and/or other countries. Other company, product, and service names may be trademarks or service marks of others.

Specifications may vary depending upon region.

Lenovo